

04/16/99
jc447 U.S. PTO

jc558 U.S. PTO
09/293702
04/16/99

Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:
FROMMER LAWRENCE & HAUG LLP
745 FIFTH AVENUE
NEW YORK, NEW YORK 10151
TEL: (212) 588-0800
FAX: (212) 588-0500

Date: April 16, 1999
Attorney Docket No.: 450117-4866

ASSISTANT COMMISSIONER FOR PATENTS
Box Patent Application
Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office
of an application for patent in the name(s) of:

Ralf SCHAEFER, Rudolf BITTNER, Markus ZUMKELLER

entitled:

A METHOD FOR DETERMINING ACCESS TIME OF REPEATEDLY BROADCAST OBJECTS

The following are enclosed:

- ☒ Specification (15 pages)
☒ 9 Sheet(s) of Drawings
☒ 13 Claim(s) (including 1 independent claim(s))
☐ This application contains a multiple dependent claim

- ☒ Our check for \$ 800.00, calculated on the basis of the claims as
amended by any enclosed preliminary amendment as follows:

Basic Fee, \$760.00 (\$380.00)	\$ 760.00
Number of Claims in excess of 20 at \$18.00 (\$9.00) each:	-0-
Number of Independent Claims in excess of 3 at \$78.00 (\$39.00) each:	-0-
Multiple Dependent Claim Fee at \$260.00 (\$130.00)	-0-
Total Filing Fee	\$ 760.00

- ☒ Assignment Recording Fee \$40.00 \$ 40.00

- ☒ Oath or Declaration and Power of Attorney
☒ New ☒ signed ☐ unsigned
☐ Copy from a prior application (37 C.F.R. 1.63(d))

- ☒ Certified copy of each of the following application(s) to substantiate
the claim(s) for priority made in the Declaration:

<u>Application No.</u>	<u>Filed</u>	<u>In</u>
98113299.6	16 July 1998	Europe

Please charge any additional fees required for the filing of this
application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicants

By William S. Frommer
William S. Frommer
Reg. No. 25,506

PATENT
450117-4866

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Ralf SCHAEFER et al.
Filed : Herewith
For : A METHOD FOR DETERMINING ACCESS TIME OF
REPEATEDLY BROADCAST OBJECTS

745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

EXPRESS MAIL

Mailing Label Number E1295738797US
Date of Deposit April 16, 1999
I hereby certify that this paper or fee is being
deposited with the United States Postal Service
"Express Mail Post Office to Addressee" Service
under 37 CFR 1.10 on the date indicated above and
is addressed to the Assistant Commissioner for
Patents, Washington, D.C. 20231.

Edward Nay
(Typed or printed name of person
mailing paper or fee)

[Signature]
(Signature of person mailing paper or fee)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Before the issuance of the first Official Action,
please amend the above-identified application as follows:

IN THE CLAIMS:

Please amend the claims as follows:

Claim 5, line 1, delete "any one of claims 2 to 4" and
insert --claim 2--;

Claim 6, line 1, delete "any one of claims 2 to 5" and
insert --claim 2--;

Claim 7, line 1, delete "any one of claims 1 to 6" and
insert --claim 1--;

Claim 9, line 1, delete "or 8";

Claim 10, line 1, delete "any one of claims 1 to 9" and
insert --claim 1--;


Claim 13, line 1, delete "anyone of claims 1 to 12"
and insert --claim 1--.

REMARKS

The claims have been amended to eliminate multiple
dependencies. The filing fee has been calculated based upon
these amendments to the claims.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicants

By 
William S. Frommer
Reg. No. 25,506
Tel. (212) 588-0800

PATENT
450117-4866

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

TITLE: A METHOD FOR DETERMINING ACCESS TIME OF
REPEATEDLY BROADCAST OBJECTS

INVENTORS: Ralf SCHAEFER, Rudolf BITTNER, Markus
ZUMKELLER

William S. Frommer
Registration No. 25,506
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

Description

1 The present invention relates to a method for determining access times of repeatedly broadcast objects in a broadcast channel using an unidirectional communication scheme in order to transmit the broadcast objects from a server side to a receiver side.

5

Information systems that are based on broadcast channels provide means only for the unidirectional communication from a server at the server side to clients at the receiver side. Therefore the clients are not able to send requests for information to the server. Instead the whole database is transmitted as a set of data
10 objects in a repetitive manner in a broadcast cycle from the server to all clients. The repetition pattern can vary to a great extent, e. g. it is possible to transmit each object once per cycle or to repeat certain objects more often than others. The repetition pattern is normally not known at the receiver side. The objects are self-identifiable which means that the client can identify a certain object
15 from the set of all transmitted objects. In case of an object request issued by the client the receiver side has to listen to what is transmitted on the broadcast medium. When the object goes by it has to copy the object to its local storage and to present to the client. In this scenario the access time can be defined as the difference between the point in time when a request is made and the point in time when the requested object is received from the medium. Due to different
20 broadcast frequencies and broadcast cycle positions of objects the access time for a certain object at a certain point in time is unknown. In comparison to an information system based on bidirectional communication the access time can vary to a much greater extent due to the fact that the access time depends on
25 the number of objects which have to share the broadcast channel.

An example of such broadcast based information system is the Teletext system which uses an unidirectional communication scheme in order to get access to information. This means that requests for data objects are not transmitted from
30 the client to the server. Instead the receiver side of the client has to listen for the requested object on the broadcast medium and copy it to its local storage when it goes by. The access time from the receiver point of view is defined as the difference between the reception point in time of the object and the point in time when the request was made. Nowadays realized broadcast based information systems are not able to determine precisely when a requested object will be available.

- 1 Therefore, it is an object of the present invention to provide a method for determining access times of repeatedly broadcast objects for realizing a progress indicator which indicates how long it takes to obtain a certain information.
- 5 To solve this object the present invention provides a method as specified in claim 1.

Preferred embodiments of the invention are described in the subclaims.

- 10 In the method of the present invention, the repetition distance defines an additional parameter which has to be transmitted with each broadcast data object at the transmitter side. The receiver side can use this information to determine the precise repetition point in time of a requested object. This information can be also used to realize the above progress indicator, so that a client can be in-
- 15 formed about the time he has to wait for the requested object. Also this information is essential for the realization of certain caching strategies i. e. in the field of caching in broadcast environments.

- In order to determine the access times of data objects transmitted in a broadcast channel some additional information, i. e. information on the repetition distance, about the broadcast cycle has to be generated at the server side and transmitted in the broadcast channel to the receiver side. The receiver side obtains the information, calculates an appropriate value and stores it. In this way an application of the repetition distance can query the next transmission point
- 20 in time of a certain object at any time.
- 25

- In the method of the present invention, a broadcast object decoder retrieves an unique identifier of an object and the repetition distance and obtains the current time value from a time service, and an absolute value for a reception point
- 30 in time is calculated from the repetition distance and the current time value and is stored together with the object. Further a data object requester allows to request certain objects by an object identifier and allows to request the next reception point in time of an object. The data object requester can use the repetition distance as repetition time information for managing a cache. As an example,
- 35 the method of the present invention is used in a progress indicator.

Further objects, details and advantages of the invention will be apparent from the following detailed description in conjunction with the drawings, in which:

- 1 **Fig. 1** and **2** are diagrams useful for explaining the meaning of the repetition distance,
- Fig. 3** shows a broadcast cycle generator,
- 5 **Fig. 4** gives a description of a broadcast cycle,
- Fig. 5** is a flowchart explaining the calculation of the repetition distance (main part),
- 10 **Fig. 6** is a flowchart explaining the calculation of the repetition distance (refinement: search for the last segment of current object),
- Fig. 7** is a flowchart explaining the calculation of the repetition distance (refinement: go to the next segment),
- 15 **Fig. 8** is a flowchart explaining the calculation of the repetition distance (refinement: calculate repetition distance from current to last segment of next repetition of current object),
- 20 **Fig. 9** is a chart explaining the calculation of the repetition distance (repetition distance as a timebased value),
- Fig. 10** shows a block diagram of the broadcast server architecture (for a DAB system),
- 25 **Fig. 11** shows the structure of an object access controller in a receiver,
- Fig. 12** shows an overview of a receiver architecture in a DAB system,
- 30 **Fig. 13** shows the receiver architecture in a DAB-system (Data decoder),
- Fig. 14** shows a basic object structure in the DAB system,
- 35 **Fig. 15** shows how the repetition distance is coded in the DAB system, and
- Fig. 16** a flowchart explaining the realization of a progress indicator.

- 1 In the following, first it is described how the repetition distance can be defined, how it is generated at the server side and how it is used at the receiver side.

Figure 1 shows an example of a simple broadcast cycle which consists of three
 5 data objects A, B and C. The transmission order is from left to right which means that objects to the right will be transmitted before objects to the left. The objects of a broadcast cycle may have different sizes and may be transmitted with different repetition rates. In this example objects A and B are transmitted twice and object C once per cycle. The objects A, B and C are marked with an
 10 index, e. g. A_{ij} . The first index i indicates the broadcast cycle, the second one j is a counter for repetitive transmissions of the object in the current cycle. For example, A_{n2} means that object A is transmitted the second time in the n -th broadcast cycle.

- 15 A parameter called repetition distance $R(X)$ is defined which is transmitted with each object X . It specifies the distance between the completed transmission of the object X and its next repetition, e. g. object A_{n1} has a repetition distance which is represented by $R(A_{n1})$. Although the repetition distance defines the distance between repetitions of objects there is no restriction that the content of
 20 objects is not allowed to change or that the size have to remain unchanged. Also the broadcast cycle does not have to be static. The repetition distance just defines the distance between two objects, but the value of the repetition distance can change with each transmitted object.

- 25 Figure 2 illustrates the basic structure of a broadcast object transmitted in a broadcast channel. A broadcast object consists of a header 1 and a body 2. The header 1 provides additional information about the data object which is encoded in the body 2. Examples of header parameters are identifiers Id which uniquely identify a certain object among all objects of the broadcast channel or a parameter which indicates the size of the object. The repetition distance can be trans-
 30 mitted together with the other parameters in the header 1.

The following alternatives can be used for the encoding of the repetition distance:

- 35 (a) Number of objects: The repetition distance $R(X)$ of an object X specifies how many objects will be transmitted after the object X until the object X will be transmitted again. This alternative is less accurate than the others (b) and (c) below.

1 (b) Amount of data: The repetition distance $R(X)$ of an object X specifies how
much data will be transmitted after the object X until the object X will be
transmitted again. Depending on how accurate the repetition distance has
to be several units of measurement can be used, e. g. bit, byte, kbyte or
5 whatever is appropriate.

(c) Time value: The repetition distance $R(X)$ of an object X specifies how long
it takes after a transmission of the object X until the object X will be
transmitted again. Depending on how accurate the repetition distance has
to be several units of measurement can be used, e. g. milliseconds, sec-
10 onds, minutes or whatever is appropriate.

In environments where it is too difficult or not possible for the broadcaster on
the server side to determine the exact repetition distance it is also possible to
15 use an upper bound. This upper bound specifies a maximum value for the repe-
tition distance so that an object will be transmitted completely maybe before the
value specified by the repetition distance but latest at the point in time specified
by the repetition distance. Each of the above mentioned alternatives can be real-
ized as an exact value or as a maximum value. In case of a maximum value it
20 has to be taken into account that the information which is given by the repeti-
tion distance is less accurate.

The term "repetition distance" shall be understood in its broadest sense: It
specifies not only distance values ("repetition distance") but also absolute values
25 ("repetition time").

In other words, in order to determine the repetition point in time of objects at
the receiver side, it is also possible to use absolute values for the signalisation.
This means that another parameter repetition time has to be carried in the ob-
30 ject header instead of the above repetition distance. The repetition time of an
object A defines when the next repetition of object A takes place.

Again, one of the following alternatives can be used for the encoding of the repe-
tition time:

35

(a) Number of objects: The repetition time $R(X)$ of an object X specifies the
absolute number of objects that have been transmitted until the object X

1 will be transmitted again. This alternative is less accurate than the others.

5 (b) Amount of data: The repetition time $R(X)$ of an object X specifies the absolute amount of data that has been transmitted until the object X will be transmitted again. Depending on how accurate the repetition time has to be several units of measurement can be used, e. g. bit, byte, kbyte or whatever appropriate.

10 (c) Time value: The repetition time $R(X)$ of an object X specifies the absolute transmission point in time of the next repetition of the object X . Depending on how accurate the repetition time has to be several units of measurement can be used, e. g. milliseconds, seconds, minutes or whatever appropriate.

15 In environments where it is too difficult or not possible for the broadcaster on the server side to determine the exact repetition time it is also possible to use an upper bound. As explained above this upper bound specifies a maximum value for the repetition time so that an object will be transmitted completely
20 maybe before the value specified by the repetition time but latest at the point in time specified by the repetition time. Each of the above mentioned alternatives can be realized as an exact value or as a maximum value. In case of a maximum value it has to be taken into account that the information which is given by the repetition time is less accurate.

25 In the following, the procedure on the server side will be explained in details with reference to the generation of broadcast cycle and repetition distance.

30 In a broadcast system the task of the server is to transmit all data objects belonging to a data service in a repetitive manner. Different transmission patterns (broadcast cycle) can be applied. It is possible to transmit some objects more often than others (see Figure 1) and in different orders. Examples of broadcast cycles for three data objects A, B and C are ABC, BAC, AABC, ABAC, ABABAC, and so on.

35 Additionally data objects can be segmented into smaller units and the segments of different data objects can be interleaved. This allows overlapped transmission

1 or nearly parallel transmission of data objects, which means that the transmission start or end of data objects can be performed nearly at the same point in time.

5 Figure 3 shows the operating structure of a broadcast cycle generator including the calculation of the repetition distance. The broadcast cycle generator takes a description of the designed broadcast cycle and the data objects. The description of the broadcast cycle is given as a sequence of segments and a sequence of objects (see Fig. 4). The sequence of objects describes which objects belong to
10 the broadcast cycle and how often each object is included in the cycle. The sequence of segments describes the transmission order of segments of all objects. Additionally a parameter specifying the allocated bitrate for the transmission of data objects is needed if the repetition distance is encoded as a time value.

15 A data object encoder 3 gets the data object e. g. a HTML file and some additional parameters like an identifier or a version information. The data object is encoded in the body and the parameters in the header as illustrated in Figure 2. The repetition distance is another parameter of the header. The calculation of the repetition distance is done in the block 4 called Repetition Distance Calculation.
20

A flowchart for the calculation is shown in the Figures 5 to 9. All data objects of the broadcast cycle will be encoded by the data object encoder 3 and stored as broadcast objects for transmission.

25

A segment selector 5 takes the information about the broadcast cycle and selects the segments from the stored broadcast objects. The selected segments are passed on to a segment transmitter.

30 In the following the calculation of the repetition distance is described (Figure 5 to Figure 8). The description of the broadcast cycle is given by the parameter object sequence and segment sequence as shown in Figure 4. The parameter object sequence contains an entry for each data object and all its repetitions in the broadcast cycle. This entry stores at least the Id of the object and the repetition
35 distance. The repetition distance must be set zero. The parameter segment sequence contains an entry for each segment to be transmitted. Each entry stores the size of the segment, the index or the object it belongs to and a flag which

1 determines if it is the last segment of this object. The sequence of segments (l..m) also determines the transmission order of segments. In case of encoding of the repetition distance as a time-based value also the bitrate allocated for the broadcast cycle is necessary for the calculation.

5

The calculation of the repetition distance (Figure 5) starts with a loop iterating over all segments of the broadcast cycle in transmission order (l..m). The parameter i references the current segment. The first block inside the loop determines the object the current segment is belonging to and stores its index in the parameter index. Index references the object in the parameter object sequence. After that the repetition distance of this object is stored in a parameter "repetition distance".

15 In the next block the repetition distance is tested if it is unequal to zero, which means that the repetition distance already has been calculated in an iteration step before. In this case the next segment can be processed.

If the repetition distance is equal to zero the repetition distance of current object is calculated in three steps. First, a search for the last segment of the current object (Figure 6) is performed. Second, the next segment (Figure 7) is achieved and third the repetition distance is calculated from this segment to the last segment of the next repetition of current object (Figure 8).

25 The first step is done as follows (Figure 6). A start is performed with the currently processed segment of the main loop which is referenced by i and its value is stored in parameter j. In the next block a loop condition is tested. In case that the segment referenced by j is not a last segment or the segment is belonging to another object as referenced by parameter "ObjectIndex" the last segment of current object is not found and the next segment must be tested. Therefore the segment index j is increased by one in case that the last segment of the cycle has not been reached. Otherwise the procedure goes back to the first segment of the sequence, which is expressed by setting the parameter j to one.

35 In the second step (Figure 7) the segment position j is set to the segment following the last segment of current object. This is done by increasing j by one in case that the last segment of the cycle has not been reached and otherwise the procedure turns back to the first segment.

- 1 In third step (Figure 8) calculates the repetition distance of the current object by addition of the segment sizes of all segments from the segment referenced by j and the last segment of the next repetition of the current object. In the first block the parameter "repetition distance" is set to zero. After that the segment
- 5 size of the segment referenced by j is added to the repetition distance parameter. In the third block it is looped as long as the segment that is referenced by j is not a last segment or the segment is belonging to an object with another Id. The latter case means that the segment is not belonging to the same object or not to a repetition of this object. If the loop is entered the segment index is in-
- 10 creased by one in case that the last segment of the cycle has not been reached. Otherwise the procedure goes back to the first segment of the sequence, which is expressed by setting the parameter j to one. Then the segment size of the segment referenced by j is added to the repetition distance and the iteration step is finished.
- 15 In case of encoding the repetition distance as a value reflecting the amount of data transmitted between two repetitions of an object the calculation has been finished at this point and the value is stored in the "repetition distance" parameter of the currently processed object. In case of encoding the repetition dis-
- 20 tance as a time-based value the parameter must be divided by the bitrate allocated for the broadcast cycle and afterwards the value is stored in the "repetition distance" parameter of the currently processed object. The last block of Figure 8 must be exchanged by the block shown in Figure 9 for the latter case.
- 25 In the following it is described as a general example how the broadcast cycle generator 9 including the calculation of the repetition distance can be realized in a DAB system (Figure 10).

A server application block 10 delivers a data service consisting of several data

30 objects (parameter: data objects). It is also responsible for the assignment of additional parameters (parameter: object parameters) to each object in order to transmit the data service via a broadcast channel. This includes unique Ids for the objects, version information, object sizes and so on. Additionally the server application block 10 has to design the broadcast cycle. This is specified by the

35 parameters "object sequence" and "segment sequence". If the encoding of the repetition distance value shall be done with a time value it is also necessary to specify the bitrate which is available to the data service. If it is not possible to

1 do this exactly a minimum or maximum value can be used. In case of a repetition distance encoding according to the amount of data or number of objects as described above a bitrate value is not required.

5 With these parameters the broadcast cycle generator 9 calculates the repetition distance of each data object and selects segments for the transmission. The selected segments are delivered together with some additional parameters concerning the segmentation, e. g. segment number, segment size, and so on to a data group encoder 11. The data group encoder 11 encodes segment data and
10 segment parameter in a so-called data group.

The data groups are delivered to a packet encoder and multiplexer/Pad field inserter (PAD = Programme Associated Data) 12. It may be gets data groups from more than one data group encoder 11, divides the data groups in smaller units
15 due to transmission packet limitations and multiplexes all the packets in a sub-channel. A subchannel is the basic frame structure of the DAB system.

In the following, the procedure on the receiver side will be explained in details with reference to the handling of the repetition distance.

20 In the following it is explained what at the receiver side has to be done in order to use the repetition distance. Figure 11 shows a block diagram with the operating of the object access controller 20 in a receiver in case a time value is used for the encoding of the repetition distance. Each object received from the broadcast channel is given to a block called broadcast object decoder 21. This is done
25 after a resegmentation and de-interleaving objects. The broadcast object decoder 21 knows about the structure of an object and has access to the header information and to the data object stored in the body.

30 First, the broadcast object decoder 21 retrieves the unique identifier of the object Id and the repetition distance RD. In the next step a current time value CT is obtained from a block 22 which is called time service. The time service can be based on the system time of the receiver if available or on any other permanent available time provider, e. g. delivered as an additional service in the broadcast
35 channel. The next reception point in time RT of the object is calculated from the current time value CT and the repetition distance RD. Then the reception point in time RT is stored with the object identifier Id for all received objects.

- 1 Second, the broadcast object decoder 21 delivers the data object encoded in the body together with additional information from the object header, e. g. the identifier Id to a block 23 called data object requester. This block 23 allows users of the block to request certain objects from the broadcast channel by the object
- 5 identifier Id. If an object is requested it has to be delivered to the requester block 23 as soon as possible. Independent from the fact if there is a request or not, the received object data can be stored in a local memory in order to provide a feater access in case of a future request.
- 10 The data object requester block 23 is connected to a storage which contains the next reception point in times for all objects once received. A user of the data object requester block 23 can query the next point in time of an object identified by its Id.
- 15 Figure 12 shows the basic structure of a DAB receiver including the data service decoding part. Basically, the DAB receiver consists of a RF-frontend 27 and a digital processing unit 30 including the data decoder 25. The RF-frontend 27 converts the received RF signal into an appropriate intermediate frequency (IF) signal. After an analog-digital conversion in a unit 26, the generation or the
- 20 base band signal (in a unit 28) and the OFDM demodulation in a FFT unit 29 a channel decoder 31 provides a subchannel which is the basic frame structure of the DAB system. In case of a subchannel containing an audio stream the subchannel is decoded by an audio source decoder 32 and converted to an analog audio signal (block 33) which is fed to a loudspeaker 34. In case of a subchan-
- 25 nel containing encoded data objects, the subchannel data is fed to the data decoder 25 which is illustrated in Figure 13. In case of a subchannel containing audio and data as PAD fields (PAD = Programme Associated Data) together it is possible either to strip off the PAD fields by the source decoder 32 and fed them to the data decoder 25 or to fed audio and data to the data decoder 25. In the
- 30 latter case the data decoder 25 has to strip off the PAD fields. The output of the data decoder 25 is used by a client application which presents the objects to the user. The data decoder 25 gets the subchannel data and decodes packets in the first step. One or more packets build a data group. Also packets of different data groups might be transmitted in an interleaved manner. A packet decoder 35 pro-
- 35 vides complete data groups to a data group decoder 36. The data group decoder 36 extracts the segments from the data groups and reassembles broadcast objects. The broadcast objects are given to the object access controller 20. The operating of the object access controller 20 is described in Figure 11.

- 1 The outputs of the object access controller 20 are the data objects itself and additional object parameters necessary for the processing by a client application.

In the following, the realization of the repetition distance in the DAB system is
5 explained in details.

In the DAB system data objects are transmitted in a basic structure which is illustrated in Figure 14. The header contains elementary information for the handling in the receiver. The header extension contains additional information
10 which is necessary for the handling of some types of data objects.

The information in the header extension is organized as a parameter list with different parameter types for different requirements concerning the length of the parameter. The coding for the repetition distance can be realized as illustrated
15 in Figure 15. A PLI field (PLI = Parameter Length Indicator) is encoded with two bits and the decimal value 2 signals that a 32 bit data field is following. A field Param (Parameter) Type indicates which parameter is encoded in the data field. The decimal value 7 is used for the repetition distance. The value of the repetition distance itself is encoded as a 24 bit value in the data field. The remaining
20 8 bit are set to 0. The value indicates the repetition distance as a maximum time value until the next repetition of the object will be completed. The resolution of the time value is 1/10 second.

In Figure 16 a flowchart is illustrated which shows how a progress indicator can
25 be realized based on the knowledge of the repetition distance. The described case is valid for a receiver which has not additional storage in which received objects can be stored for future requests.

The action is initiated by a request for an object identified by its Id (Request Object (Id)). In the first step the next reception point in time (RT) is retrieved and
30 stored. After that the current time value is obtained and stored in CT. The remaining time R is calculated as the difference of RT and CT. The result is the maximum value for a progress indicator and can be presented to the user. In order to indicate the progress of reception the progress indicator has to be updated in certain intervals. Therefore a timer can be started with an appropriate
35 time out value, e. g. one second. After that a request for the object is made at the object access block 20.

- 1 The next action is initiated by the time outs of the timer 22 (Notify Time Out).
With each time out the remaining time for the reception R is calculated from the
reception point in time (RT) and the current time value (CT). The time value is
going on and the remaining time R becomes smaller. After that the progress in-
5 dicator is updated with the new value.

It should be noted that "time out" will be initiated several times before the re-
ception of the object is indicated (notify object reception). Then the timer has to
be stopped in order to stop updating the progress indicator. After that the object
10 is presented to the user.

In the following caching strategies are explained as an application of the repeti-
tion distance.

- 15 Caching is often used in order to improve the access time of data objects. The
idea behind is to store copies of data objects in a local memory which is faster
accessible than the medium where the objects are obtained from. In order to de-
termine which objects to store usually a heuristic is used which estimates the
access probabilities of the user. The access time of objects from the medium is
20 usually not used in caching strategies, because in bidirectional communication
environments exist only slight differences in the access times of different ob-
jects. In broadcast environments all objects share the same broadcast channel.
The access times grows with the number of objects which use the channel. Also
some objects are transmitted more often than others. This means that the ac-
25 cess times of objects can vary to a great extent.

In broadcast environments a caching strategy has to consider the access prob-
abilities of the user and the access times of the objects. The access time of ob-
jects can be determined by the repetition distance. One strategy is to store al-
30 ways those objects in the cache which have the largest access times. Another
more sophisticated strategy is to store always those objects in the cache which
have the largest access times and which belong to a set of objects with access
probabilities that are greater than a certain minimum value.

- 35 As time goes by the repetition distance of the objects changes and objects in the
cache are exchanged.

- 1 Broadcast systems today do not allow to determine the access time of objects
transmitted in a broadcast channel. The repetition distance uses an additional
parameter in the header of a broadcast object in order to inform about the next
repetition of this object. In combination with the proper operating in a receiver
5 it is possible to determine the access times of all objects once received before.
The repetition distance can be realized with several units of measurement.

Two applications for the repetition distance are a progress indicator and storage
management for the improvement of access times.

10

15

20

25

30

35

Claims

- 1 **1.** A method for determining access times of repeatedly broadcast objects in a
broadcast channel using an unidirectional communication scheme in order
to transmit the broadcast objects from a server side to a receiver side, **char-**
acterized in that the broadcast object includes a header defining a repeti-
5 tion distance which is the distance between the completed transmission of
the broadcast object and its next repetition, and a next reception point in
time of said broadcast objects is calculated from a current time value and
said repetition distance.
- 10 **2.** The method according to claim 1, **characterized in that** said repetition dis-
tance (R) specifies how many objects (A, B, C) will be transmitted after a spe-
cific broadcast object until this specific broadcast object will be transmitted
again.
- 15 **3.** The method according to claim 1, **characterized in that** said repetition dis-
tance (R) specifies how much data will be transmitted after a specific broad-
cast object until this specific broadcast object will be transmitted again .
- 20 **4.** The method according to claim 1, **characterized in that** said repetition dis-
tance (R) specifies how long time it takes after a specific broadcast object un-
til this specific broadcast object will be transmitted again.
- 25 **5.** The method according to any one of claims 2 to 4, **characterized by** an upper
bound which specifies a maximum value for the repetition distance (R).
- 30 **6.** The method according to any one of claims 2 to 5, **characterized in that** the
repetition distance specifies an absolute value in the form of a repetition
time.
- 30 **7.** The method according to any one of claims 1 to 6, **characterized in that** on
the server side a broadcast cycle generator (see Fig. 3) describes a broadcast
cycle as a sequence of segments and a sequence of objects, the sequence of
objects describing which objects belong to the broadcast cycle and how often
each object is included in the broadcast cycle, and the sequence of segments
describing the transmission order of segments of all objects.

- 1 **8.** The method according to claim 7, **characterized in that** a parameter specifying an allocated bitrate for the transmission of objects is added if the repetition distance is encoded as a time value.
- 5 **9.** The method according to claim 7 or 8, **characterized in that** in a DAB system the broadcast cycle generator (9) receives object parameters from a server application block (10), calculates the repetition distance of each object and selects segments for the transmission.
- 10 **10.** The method according to any one of claims 1 to 9, **characterized in that** a broadcast object decoder (21) retrieves an unique identifier of an object (Id) and the repetition distance and obtains the current time value from a time service (22), and an absolute value for a reception point in time is calculated from the repetition distance and the current time value and is stored together with the object (Id).
- 15 **11.** The method according to claim 10, **characterized in that** a data object requester (23) allows to request certain objects by an object identifier (Id) and allows to request the next reception point in time of an object.
- 20 **12.** The method according to claim 11, **characterized in that** the data object requester (23) can use the repetition distance as repetition time information for managing a cache.
- 25 **13.** The method according to anyone of claims 1 to 12, **characterized in that** it is used in a progress indicator.

30

35

Abstract

A Method for Determining Access Time of repeatedly Broadcast Objects

Broadcast based information systems like Teletext use a unidirectional communication scheme in order to get access to information. This means that requests for data objects are not transmitted from a client to a server. Instead the receiver part of the client has to listen for the requested object on the broadcast medium and copy it to the local storage when it goes by. The access time from the receiver point of view is defined as the difference between the reception point in time of the object and the point in time when the request was made. Nowadays realized broadcast based information systems are not able to determine precisely when a requested object will be available. The present invention uses a repetition distance which defines an additional parameter which has to be transmitted with each broadcast data object at the transmitter side. The receiver can use this information to determine the precise repetition point in time of a requested object. This information can be used to realize a progress indicator, so that an user can be informed about the time he has to wait for the requested object. Also this information is essential for the realization of certain caching strategies.

(Figure 2)

Fig.1

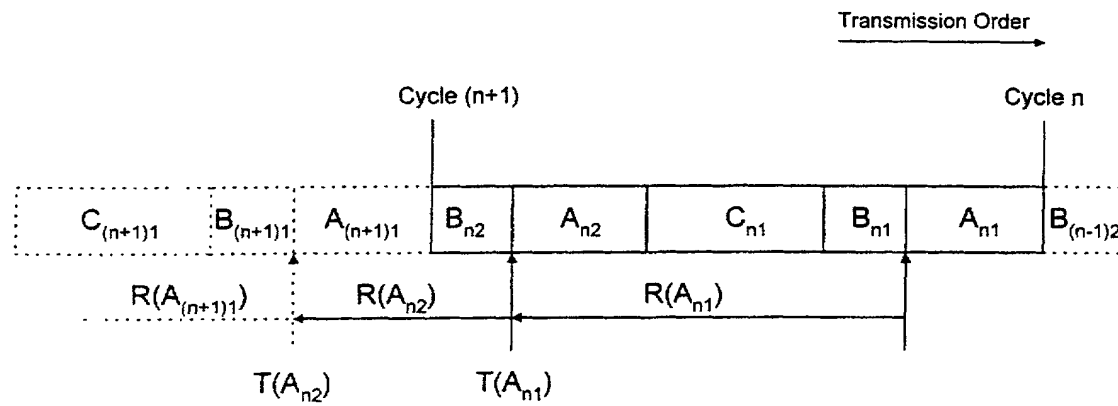


Fig.2

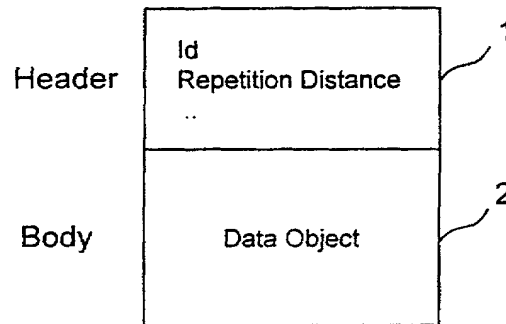


Fig.3

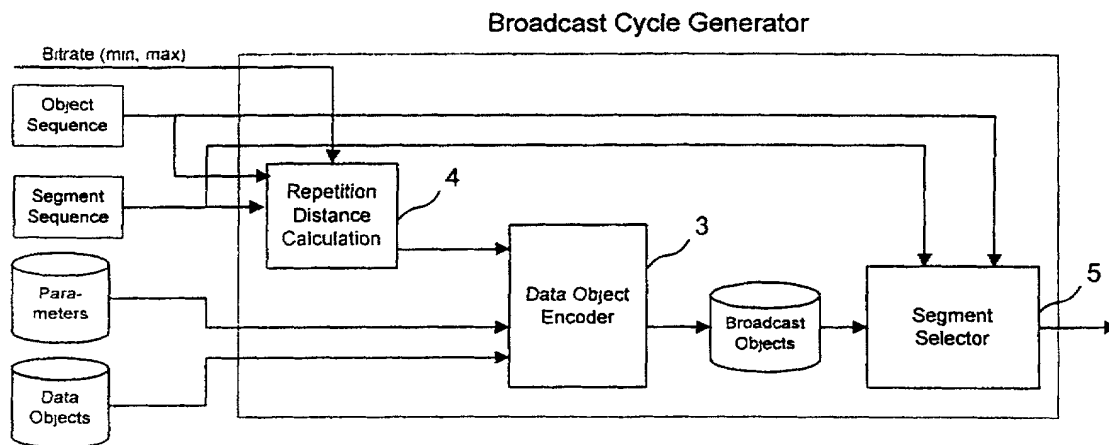


Fig.4

ObjectSequence[1..n] = { Id, RepetitionDistance, ... }

SegmentSequence[1..m] = { SegmentSize, LastSegment, ObjectIndex, ... }

Fig.5

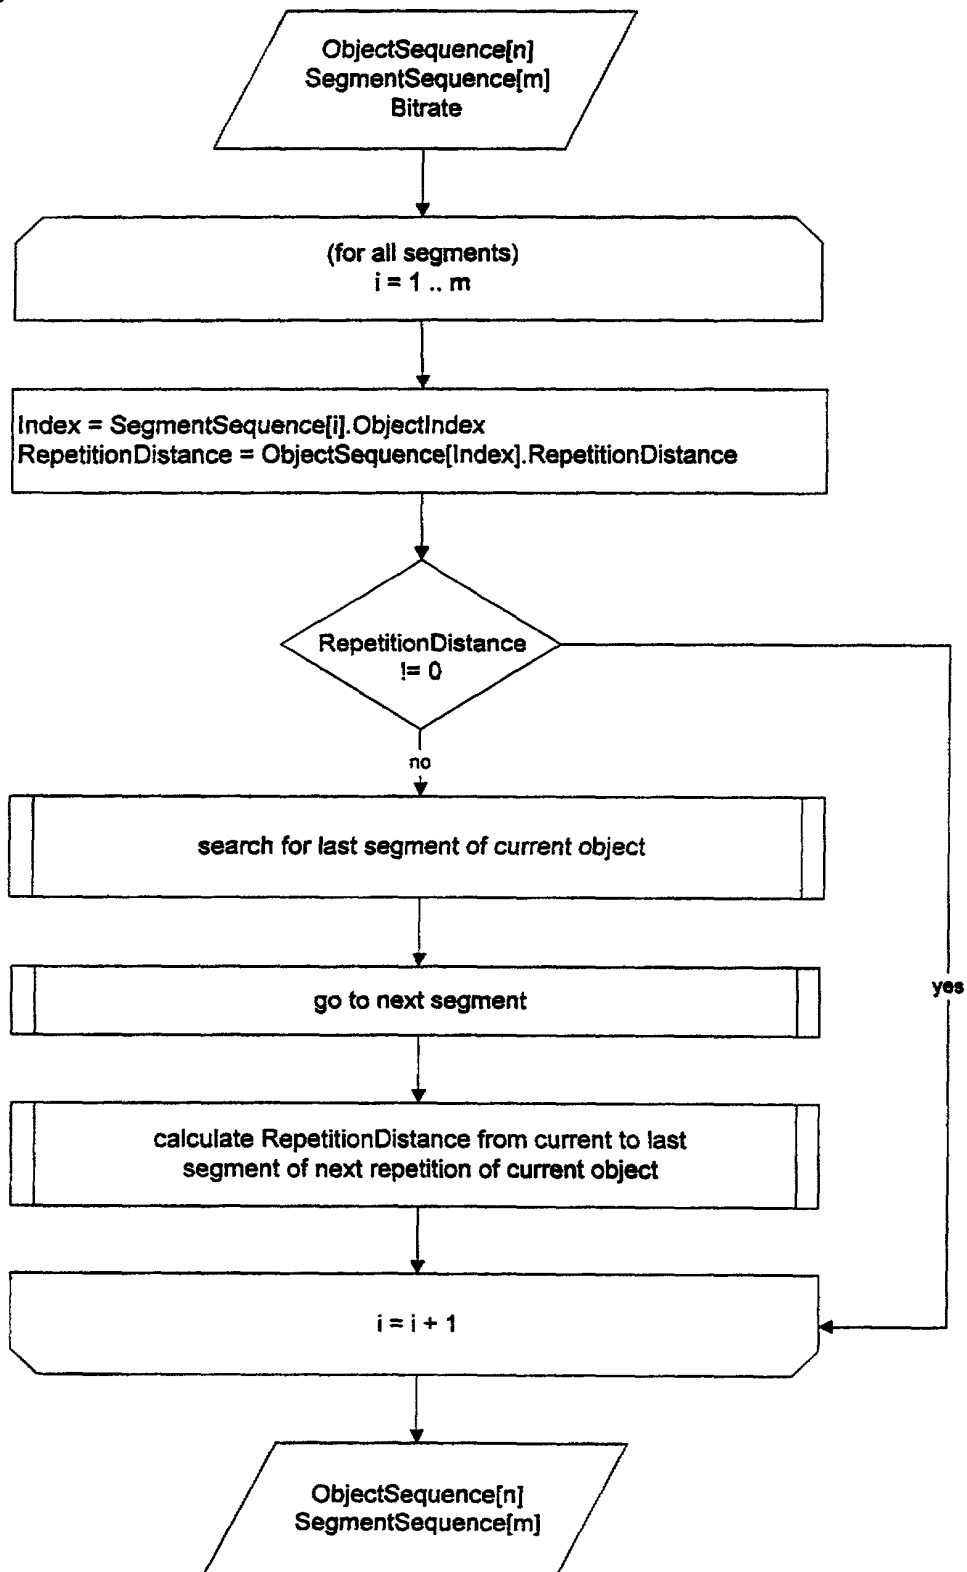


Fig.6

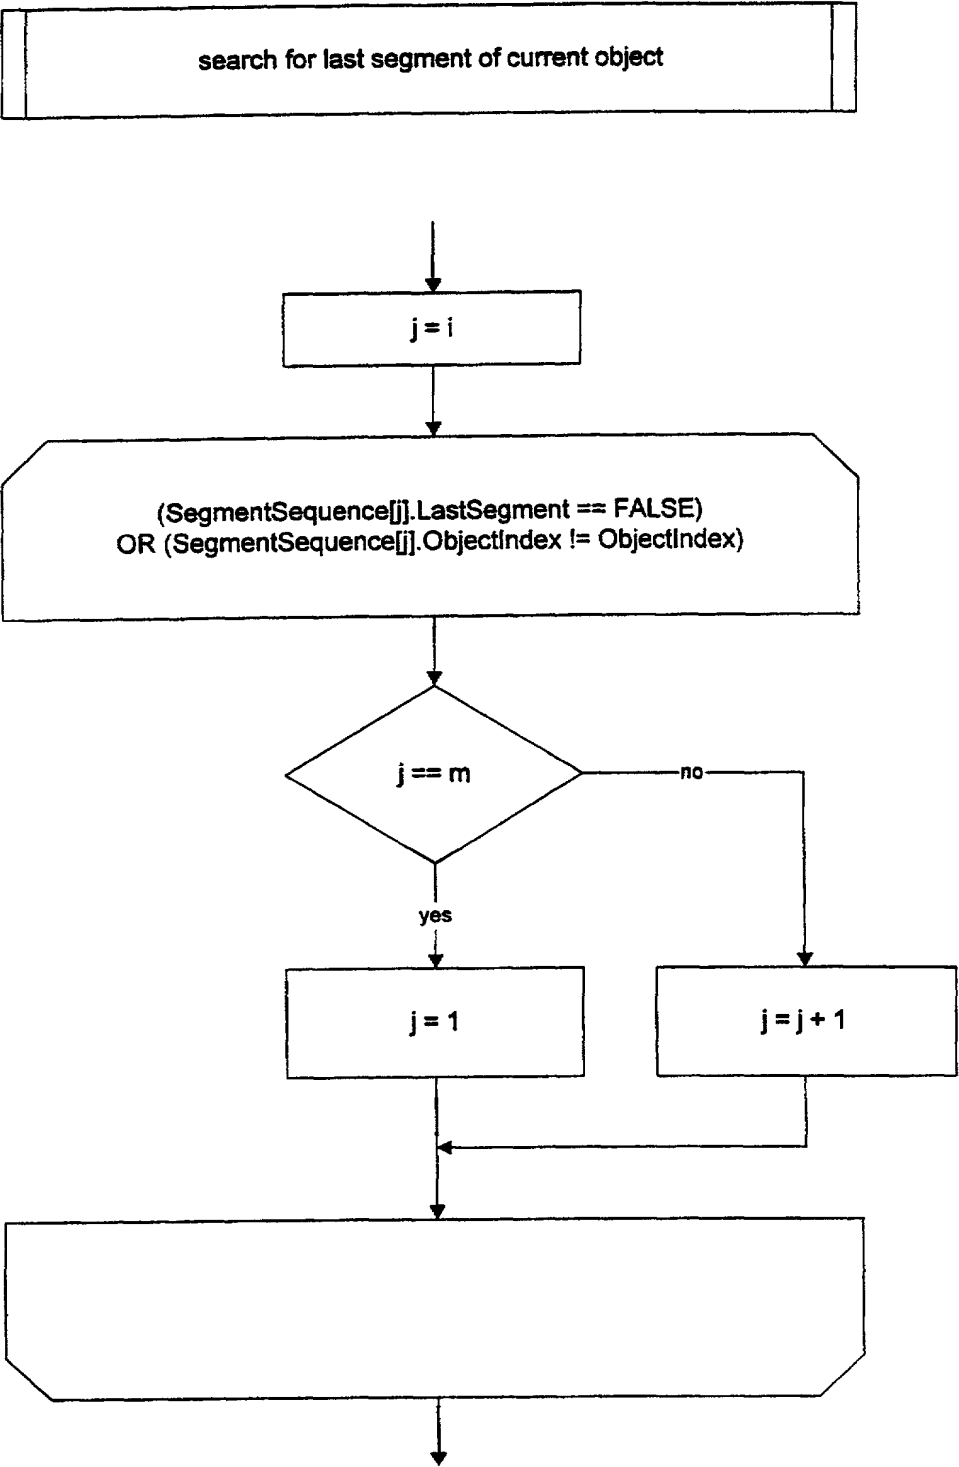


Fig.7

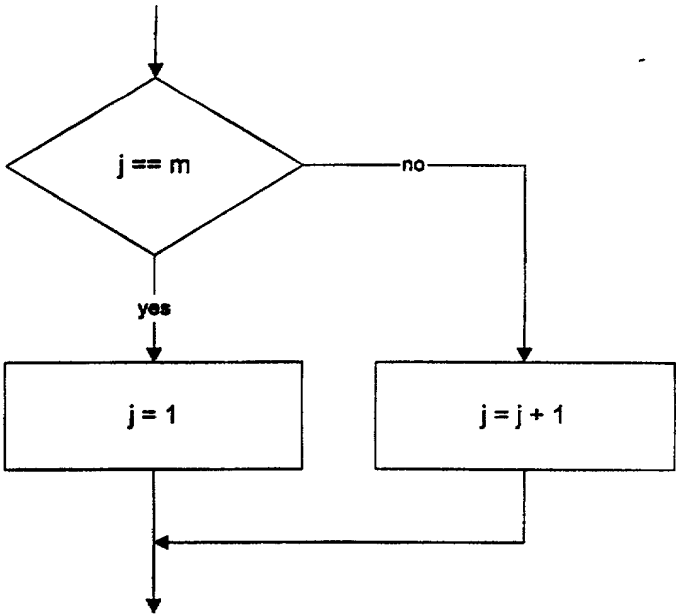


Fig.8

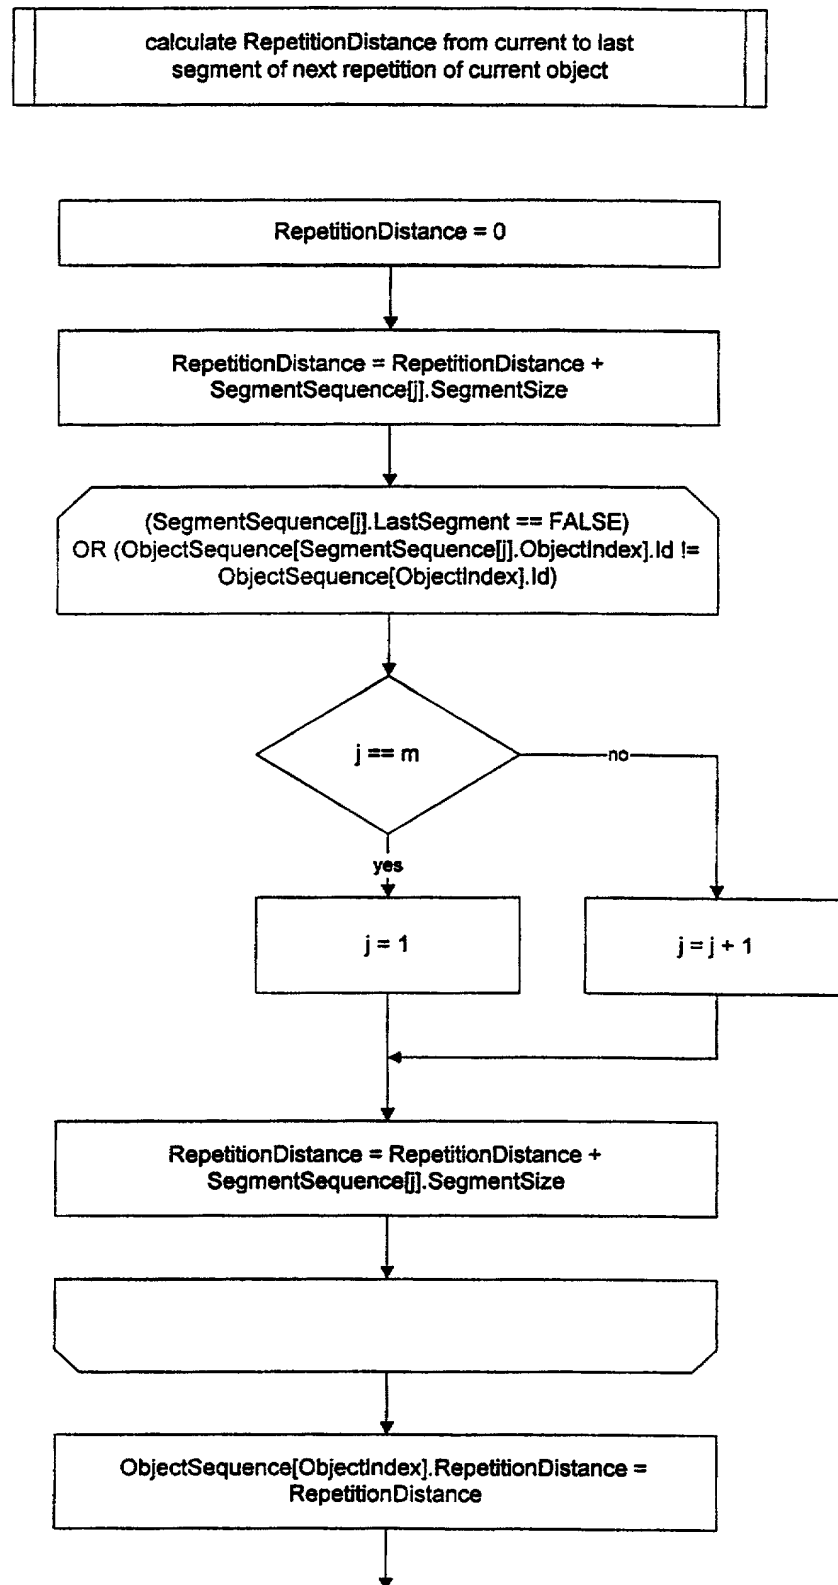


Fig.9




Fig.10

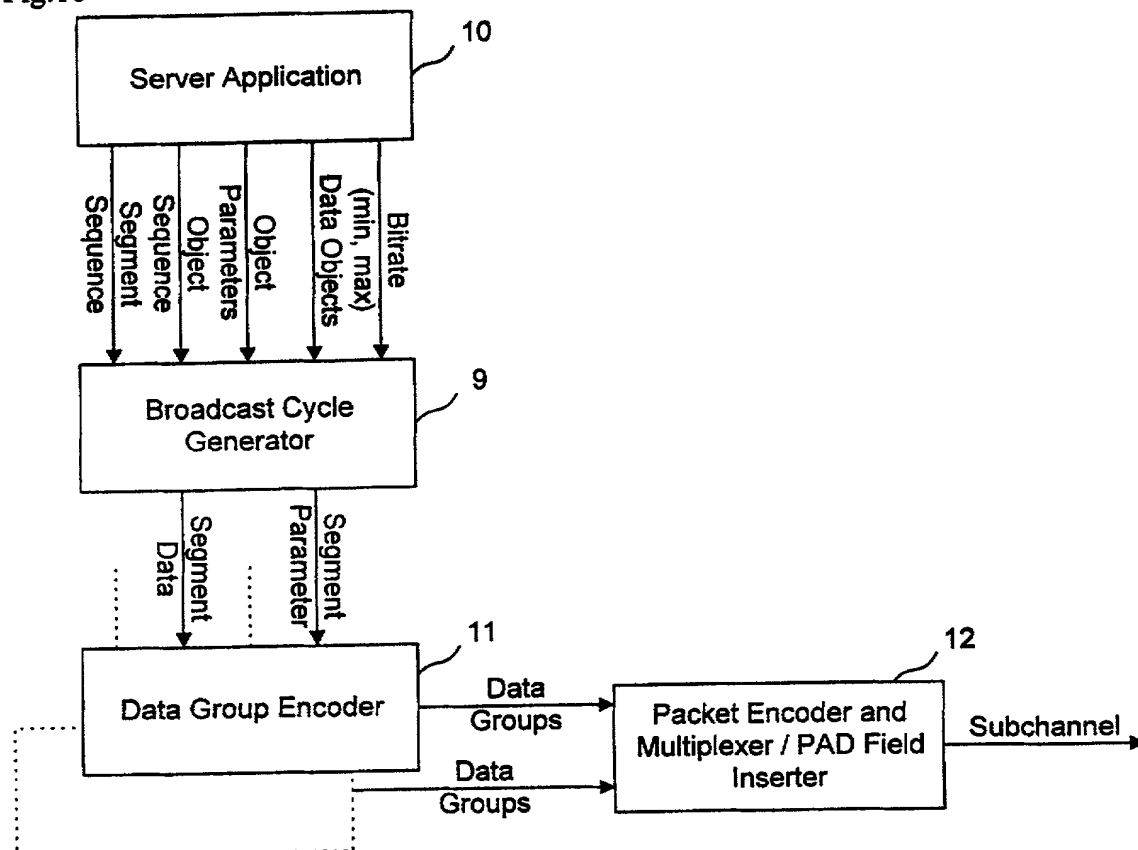


Fig.13

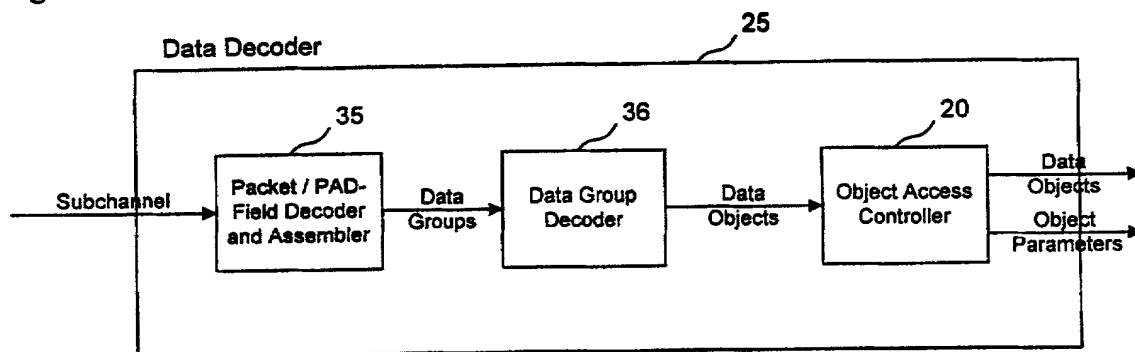


Fig.14




Fig.11

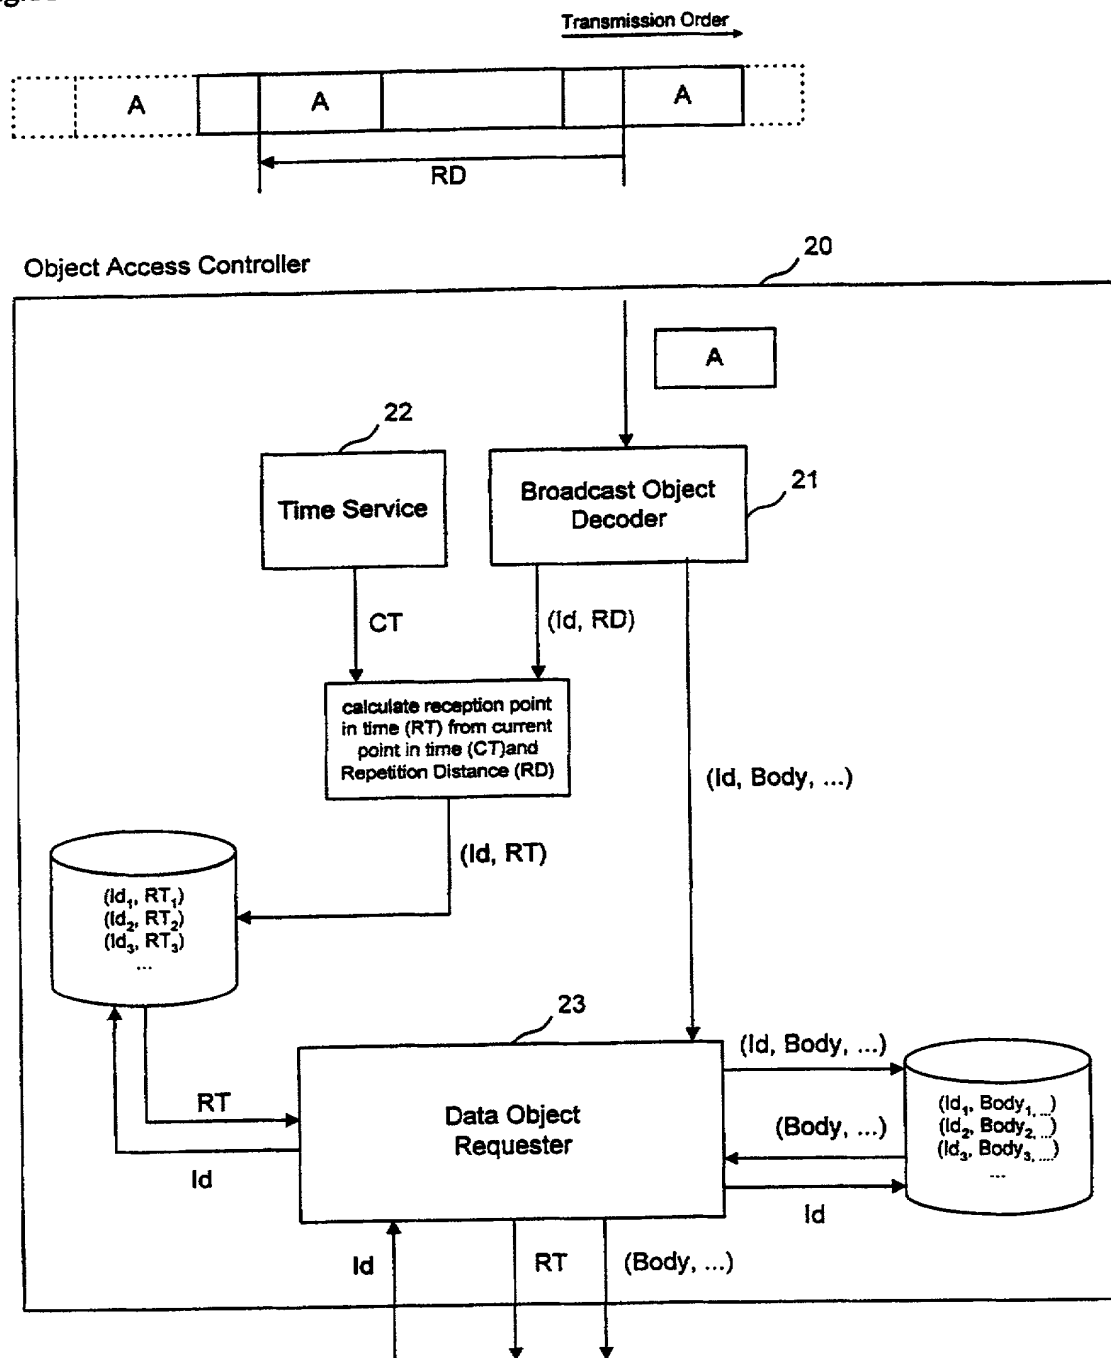


Fig.12

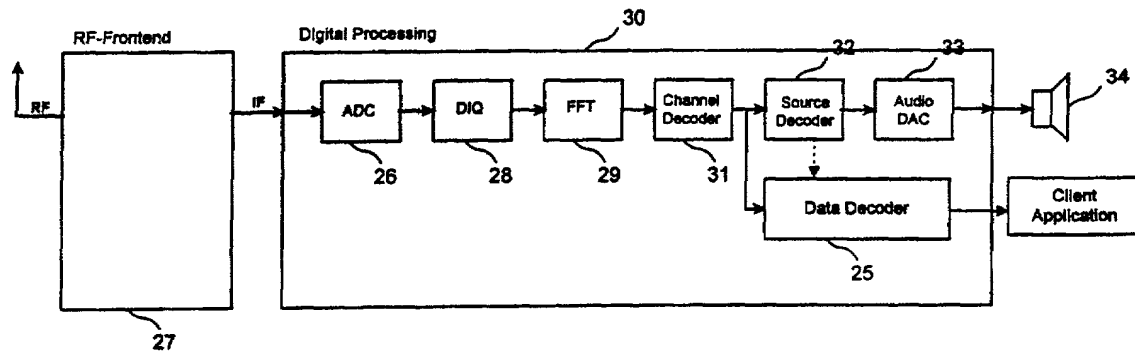


Fig.15


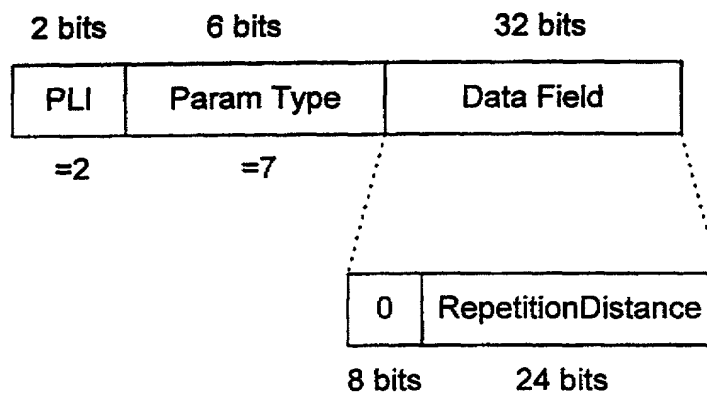


Fig.16

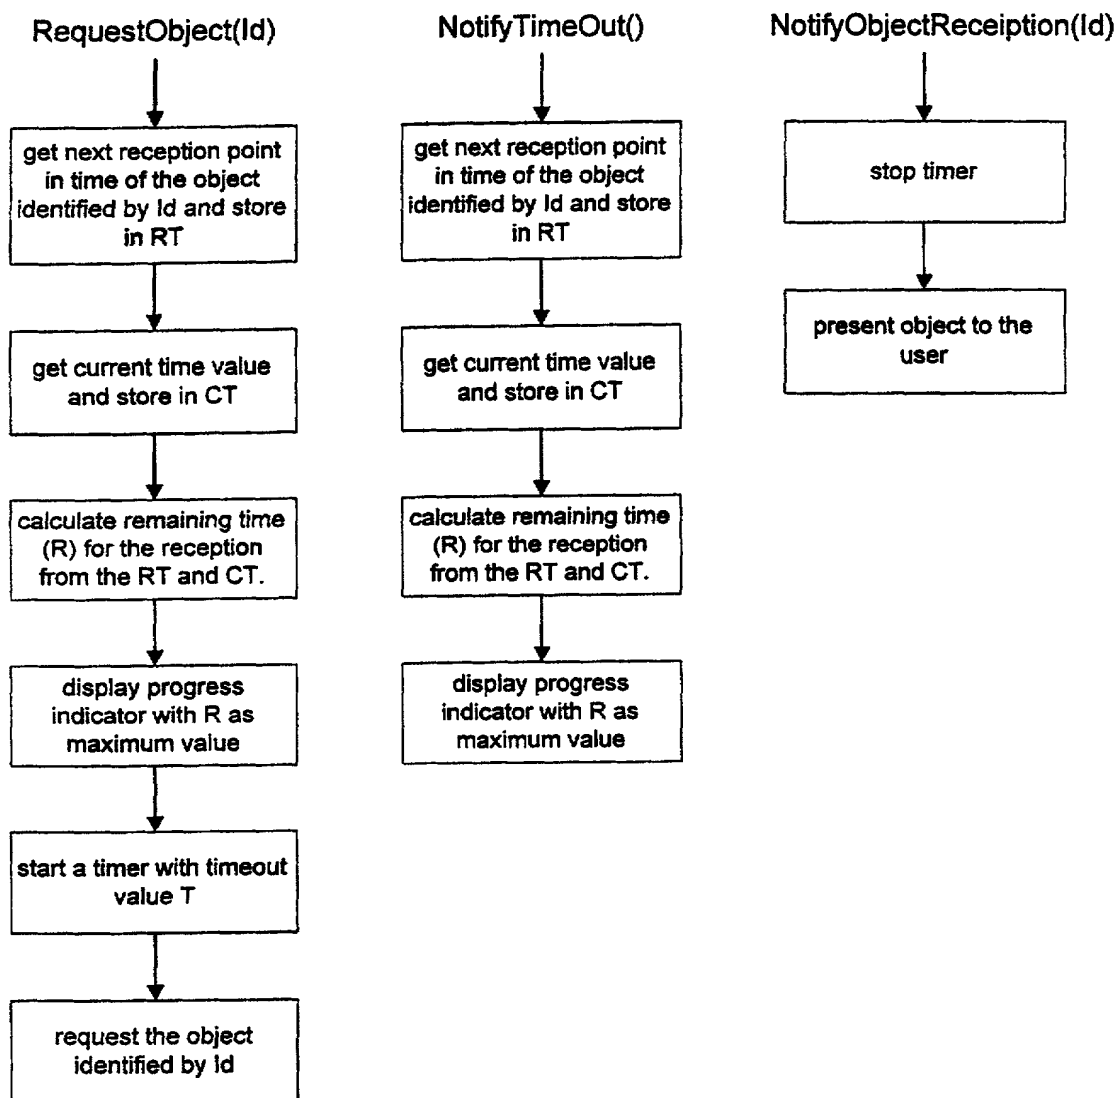

DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)

(Under 37 CFR § 1.63; with Power of Attorney)

FROMMER LAWRENCE & HAUG LLP

FLH File No. 450117-4866

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

A METHOD FOR DETERMINING ACCESS TIME OF REPEATEDLY BROADCAST OBJECTS

the specification of which

X is attached hereto.

_____ was filed on _____ as Application Serial No. _____,

with amendment(s) through _____ (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) [list additional applications on separate page]: Priority Claimed:

Number:
98113299.6-2209

Country:
Europe

Filed (Day/Month/Year):
16 July 1998

Yes No
X

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s) [list additional applications on separate page]:

App'n. Ser. Number: Filed (Day/Month/Year): Status (patented, pending, abandoned):

I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 34,930 or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:

WILLIAM S. FROMMER, Esq.
c/o FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Direct all telephone calls to:
(212) 588-0800
to the attention of:
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S):

Signature: Ralf Schaefer

Date: 26.03.99

Full name of sole or first inventor:

Ralf SCHAEFER

Residence:

Meissnerstrasse 18, D-70736 Fellbach, Germany

Citizenship:

German

Signature: Rudolf Bittner

Date: 26-03-99

Full name of 2nd joint inventor (if any):

Rudolf BITTNER

Residence:

Schneegloeckleweg 21, D-70374 Stuttgart, Germany

Citizenship:

German

Signature: Markus Zunkeller

Date: 30.3.99

Full name of 3rd joint inventor (if any):

Markus ZUMKELLER

Residence:

Fichtenstrasse 8, D-71409 Schwaikheim, Germany

Citizenship:

German

[Similarly list additional inventors on separate page]

Post Office Address(es) of inventor(s):

SONY International (Europe) GmbH
Hugo-Eckener-Strasse 20
D-50829 Köln
GERMANY

If all inventors have the same post office address]

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming for Supporting a Claim by Another for Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, individual Non-Inventor].

Note: A post office address must be provided for each inventor.